

Andromeda LED 30W



IP54 Front
IP20 Rear
CE, RoHS

- V** 100-240Vac (driv. inc.)
- W** 30W
- 💡** LED
- lm** 90 lm/W 5500 K
- lm** 87 lm/W 4000 K
- lm** 80 lm/W 3000 K
- ▽**
- II**
- ▲** 100°
- 🔌** Screw terminal
- 🖋️** White
- 🏠** Aluminum / PC
- Ta** -25°C
+45°C





Col. Temp. 3000 K
Warm white
cod. DWL1230-WW

Col. Temp. 4000 K
Natural white
cod. DWL1230-NW

Col. Temp. 5500 K
Cool white
cod. DWL1230-W

Series of recessed LED technology square-shaped fixtures. On request it is also possible to change the fixture body colour. Ideal for any type of lighting such as offices, house, shops, public offices and clinics.

Code	Colour Temperature	Input Voltage	Power	Luminous Yield	LED Source	Beam Aperture	Socket	CRI	Material Body/Diff	Insulation Class	Protection IP	IK Rating	Ambient Temperature	Standard
DWL1230-WW	3000 K Warm White	100 - 240V ac	30W	80 lm/W	LED	100°	Screw terminal	Ra > 80	Aluminum PC	II	IP54 Front IP20 Rear	07	-25°C to +45°C	CE RoHS
DWL1230-NW	4000 K Natural White	100 - 240V ac	30W	87 lm/W	LED	100°	Screw terminal	Ra > 80	Aluminum PC	II	IP54 Front IP20 Rear	07	-25°C to +45°C	CE RoHS
DWL1230-W	5500 K Cool White	100 - 240V ac	30W	90 lm/W	LED	100°	Screw terminal	Ra > 80	Aluminum PC	II	IP54 Front IP20 Rear	07	-25°C to +45°C	CE RoHS

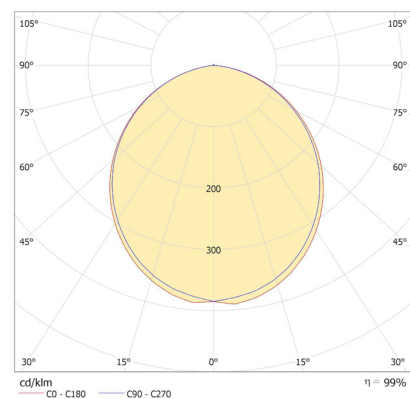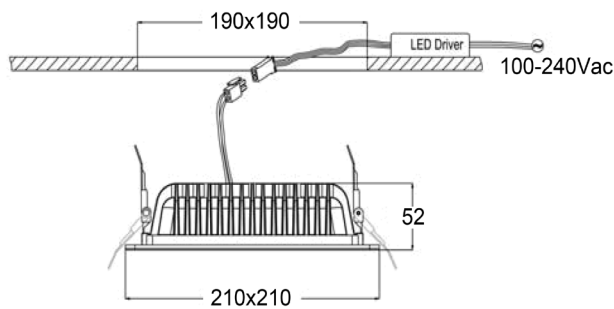

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice