

CE, RoHS

- IP54 Front
- IP40 Rear
- 100 ÷ 240Vac (Driver Inc.)
- 15W
- COB LED
- II
- cable
- 125x125 mm
- White
- Aluminium+PC
- 10°C
+40°C
- Driver 111x42x27mm
- 50000 hr (L80B20)



UGR ≤ 19

Group "0"
Photobiological safety

CRI ≥ 85

LED
120 lm/W


Questo dispositivo è munito di lampade a LED integrate

A++	}	L	
A+			E
A			

100°

Pegaso LED with reflector and anti-glare optics, high brightness and comfortable luminous flux. High colour rendering index (CRI). Its elegant and light weight, but at the same time strong structure, makes it suitable for many applications such as shops, malls, offices, clinics and homes.

Code	Input Driver Inc.	Watt	Lumen Out	CRI	Light source	Beam Angle	Body	Diffuser	Insulation Class	Front IP Rate	Rear IP rate	IK rate
DWL1515-NW	100-240Vac	15W	2689	Ra>80	LED	100°	Aluminium	PC	II	54	20	08
DWL1515-WW	100-240Vac	15W	2635	Ra>85	LED	100°	Aluminium	PC	II	54	20	08

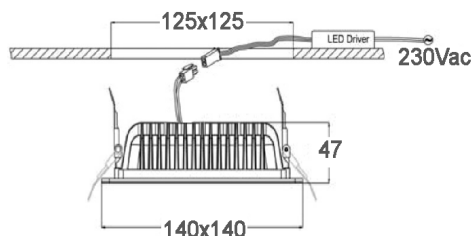

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
 Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice