



- IP65
- 230Vac
- 3,5W
- Osram LED
- A**
- Cavo Cable
- Ø50mm
- Silver
- Aluminium
- 15° asim.
- 10°C
+45°C
- 36000 hr (L90B20)



CRI ≥ 80
LED 100 lm/W
Questo dispositivo è munito di lampade a LED integrate

Compact LED fixture with asymmetric beam used as marking steps or leader illumination. WAL0016 can be installed directly in plaster walls or false-ceiling thanks to two steel clamps integrated or through the included recessed box.

Cod.	Col. tempt	Input Volt	Watt	CRI	LED Chip	Beam Angle	Body Material	Lens	Insulation Class	IP Rating	IK Rating
WAL0016-W	6000K	230Vac	3.5W	Ra>80	LED	as. 15°	Aluminium	PC	I	65	08
WAL0016-WW	3000K	230Vac	3.5W	Ra>80	LED	as. 15°	Aluminium	PC	I	65	08

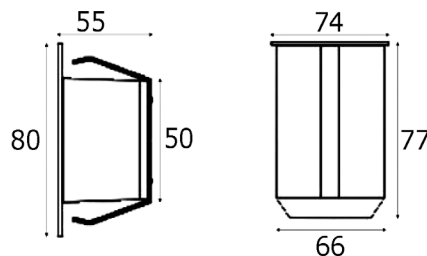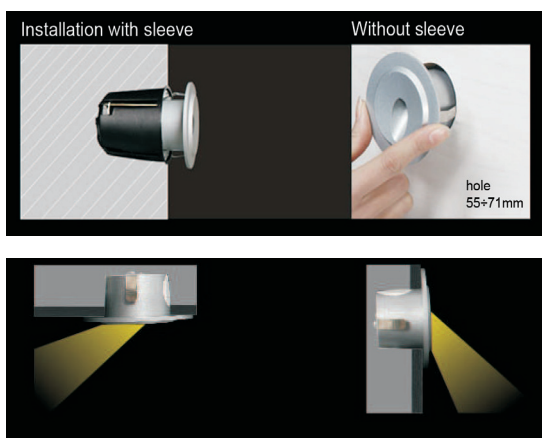

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice