

## CE, RoHS

- IP54 Front
- IP44 Rear
- 230Vac
- 24W
- LED
- 
- 
- Cable
- 200/220 mm
- White
- Aluminim+PC
- 20°C  
+45°C
- 50000 hr (L80B20)



cod. DWL7024-WW (2285 lm)  
Temp. Col. 3000K

cod. DWL7024-NW (2376 lm)  
Temp. Col. 4000K

UGR ≤20
CRI ≥ 95
 Photobiological Safety GR "0"
LED 110 lm/W
Dim.
Questo dispositivo è munito di lampade a LED integrate
A++ A+ A
} LED
 100°

This luminaire is fitted with an anti-glare optics and an intense but comfortable luminous flux. Its high color rendering index (CRI 95) along with its elegant, thin and light and tough structure, makes it suitable for many applications such as shops, malls, offices, clinics and homes.

Codice	Driver	Input Driver	Watt	PFC	Luminous Flux	CRI	Light Source	Beam Angle	Material	Front Material	Insulation Class	Front IP	IK Rating
DWL7024-NW	included	230Vac	24W	≥ 0.95	2376 lm	Ra>85	LED	100°	Aluminium	PC	II	IP54	06
DWL7024-WW	included	230Vac	24W	≥ 0.95	2285 lm	Ra>95	LED	100°	Aluminium	PC	II	IP54	06

## Accessories



cod. KBATT1236  
Emergency Kit 3h



cod. LP125421  
Dim. driver 1-10V / Push



cod. CO101-D1  
DALI LUX sensor &  
Push Dimmer

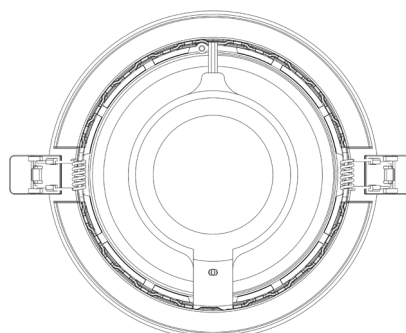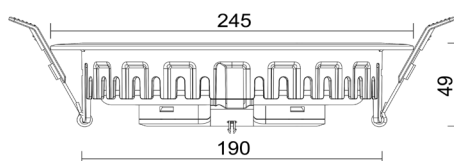

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso  
 Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice