



SQUARE INGROUND LED



- IP67
- 24Vdc
- 3,5W single color
4W full colour RGB
- 1 Osram LED
-
-
- Cable
- Ø44mm
- Satin
- ST 316+Aluminium
- 1330Kg x Ø10mm
- 10°C
+45°C
- 270 g + 76 g box
- 36000 ore (L90B20)

CONNESSIONE: RGB
RGB CONNECT



IP67
CE, RoHS






- CRI**
≥ 80
- LED**
140 lm/W
- Dim.
- Questo dispositivo è munito di lampade a LED integrate
- A++ } L
A+ } E
A } D
- 30°

- cod. ING8003-WW (335 lm)
Temp. Col. 3200K Warm White
- cod. ING8003-W (352 lm)
Temp. Col. 5500K Cool White
- cod. ING8003-RGB (130 lm)
Col. Full Color

Carriageable recessed LED light with asymmetrical or symmetrical optical system. The product can be used for indoor or outdoor installations. Thanks to the stainless steel springs the fixture can be installed directly in ceilings and walls. The fixture is equipped with recessed box. Dimmable with DMX interface but partially and with discrete levels only.

Code	Color Temperature	Input Volt	Watt	Luminous Efficiency	CRI	LED Chip	Beam Angle	Body Material	Front Material	Insulation Class	IP Rate	IK Rate
ING8003-WW	3200 K	24Vdc	3,5W	130 lm/W	Ra>80	LED	30°	Aluminium	ST 316	II	67	09
ING8003-W	5500 K	24Vdc	3,5W	140 lm/W	Ra>80	LED	30°	Aluminium	ST 316	II	67	09
ING8003-RGB	RGB	24Vdc	4W	//	//	LED	30°	Aluminium	ST 316	II	67	09

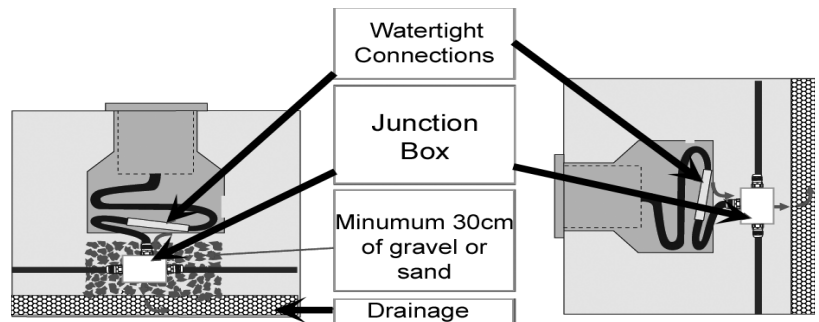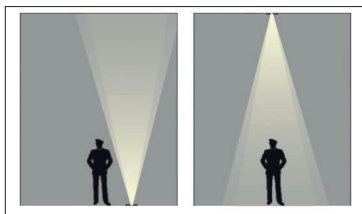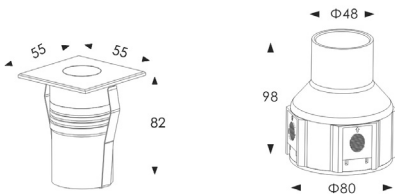

- Secure that you have a good drainage.
- Secure that the water don't stand in the recessed box.
- Secure that the cables junctions are watertight.

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice