

HP2-12 Strip LED IP20



IP20

CE, RoHS

- V** 24Vdc
- W** 60W (12W/m)
- Lightbulb** 60 LED/m
- Circle with arrow** R<50mm - Ø<100mm
- Triangle with exclamation mark**
- II** Insulation class II
- Triangle** 120°
- Wires** Wires
- Ta** -25°C
+45°C



CRI
≥ 80

Photobiological Safety GR "0"

A++ A+ A **A++**

120°




HP STRIP IP20 VERY HIGH EFFICIENCY

HP12 LED strips, obtained from the experience of Arena Luci. This innovated technology has enabled us to achieve a luminous flux of 25 lumens per LED, something unthinkable a short time ago. There are four models in this series: 60, 84 and 120 LED/m, three colour temperatures, warm, natural and cool white, for all possible uses. There is a wide range of power supplies with different sizes and dimming controls such as button or rotary dimmer, 0-10V dimmer, DALI dimmer and DMX dimmer. Necessary for the installations are our aluminum profiles complete with covers: opals, semi-opals and transparent

- The strip itself and all its components may not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- Installation of LED ribbon (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
- Correct electrical polarity needs to be observed. Wrong polarity may destroy the strip.

Code	Color temperature	Smalles unit	Max length	Volt	Watt / 1mt	Watt / 5mt	LED Flux	LED / 1mt	LED / 5mt
LS2912-WW	3000K	100 mm	5000 mm	24Vdc	12W	60W	23 lm/LED	60 SMD	300 LED
LS2912-NW	4000K	100 mm	5000 mm	24Vdc	12W	60W	24 lm/LED	60 SMD	300 LED
LS2912-W	6000K	100 mm	5000 mm	24Vdc	12W	60W	25 lm/LED	60 SMD	300 LED

Maximum continuous connection 5m

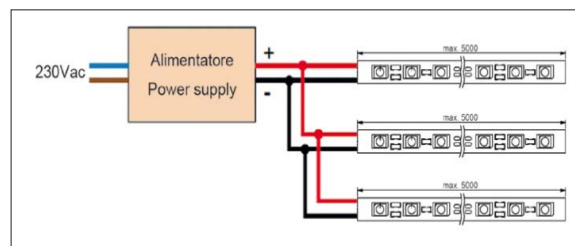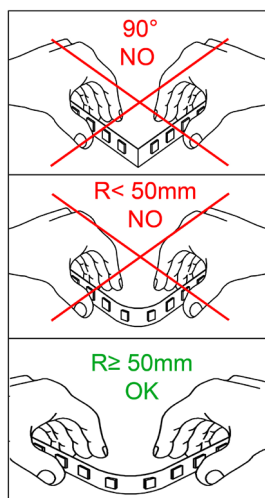

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
 Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice