

HP2-23 Strip LED IP20



IP20
CE, RoHS

- IP20
- 24Vdc
- LED SMD 2835
- Cable
- Min. 10cm
- 25°C
+40°C
- 50000 hr (L80B20)



CRI ≥ 80




A++ A+ A

120°

HP23 LED strips, obtained from the experience of Arena Luci. This innovated technology has enabled us to achieve a luminous flux of 25 lumens per LED, something unthinkable a short time ago. There are four models in this series: 60, 84 and 120 LED/m, three colour temperatures, warm, natural and cool white, for all possible uses. There is a wide range of power supplies with different sizes and dimming controls such as button or rotary dimmer, 0-10V dimmer, DALI dimmer and DMX dimmer. Necessary for the installations are our aluminum profiles complete with covers: opals, semi-opals and transparent

- The strip itself and all its components may not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- Installation of LED ribbon (with power supplies) needs to be made with regard to all applicable electrical and safety standards.
- Only qualified personnel should be allowed to perform installations.
- Correct electrical polarity needs to be observed. Wrong polarity may destroy the strip.
- Parallel connection is highly recommended as safe electrical operation mode.
- Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the strip.
- Please ensure that the power supply is of adapters power to operate the total load.
- When mounting on metallic or otherwise conductive surfaces, there needs to be an electrical isolation points between strip and the mounting surface.
- Pay attention to standard ESD precautions when installing the strip.
- Damaged by corrosion will not be honored as a materials defect claim.
- It is the user's responsibility to provide suitable protection

Code	temperature	Smalles unit	Max length	Volt	Watt / 1mt	Watt / 5mt	LED Flux	LED / 1mt	LED / 5mt
LS2923-WW	3000K	50 mm	5000 mm	24Vdc	23W	115W	23 lm/LED	120 SMD	600 LED
LS2923-NW	4000K	50 mm	5000 mm	24Vdc	23W	115W	24 lm/LED	120 SMD	600 LED
LS2923-W	6000K	50 mm	5000 mm	24Vdc	23W	115W	25 lm/LED	120 SMD	600 LED

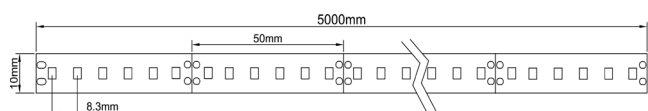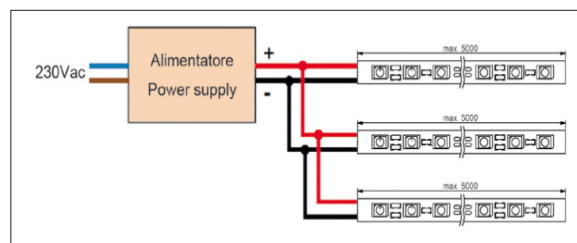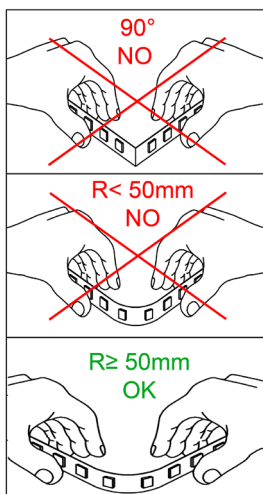

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice