









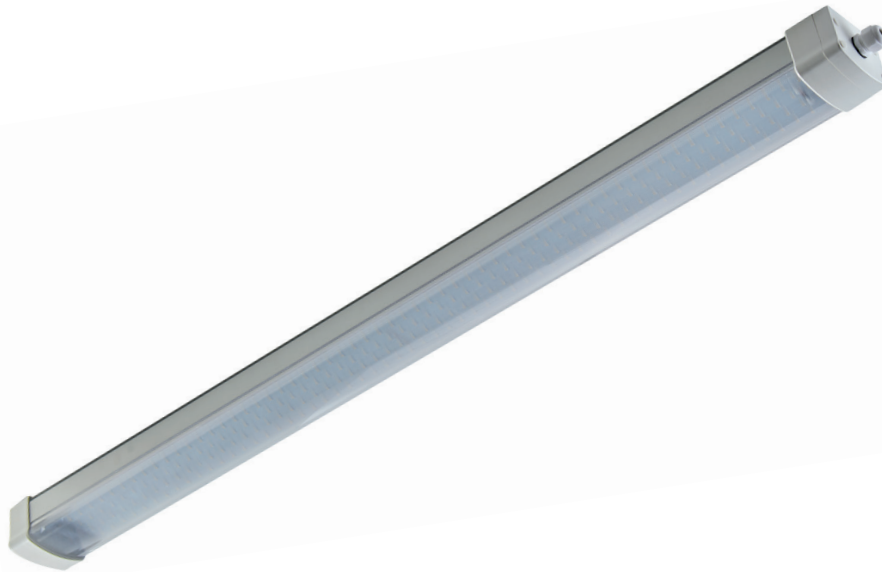


ALU-PLUS 0631 Aluminum IP66 fixture

IP66

CE, RoHS

-  IP66
-  200 - 240Vac
-  30W
-  3000 lm
-  SMD LED
-  Fast connection system
-  Grey/White
-  Aluminum / PC
-  -20°C...+45°C
-  50000 hr (L70B50)



CRI
≥ 80

LED
120 lm/W

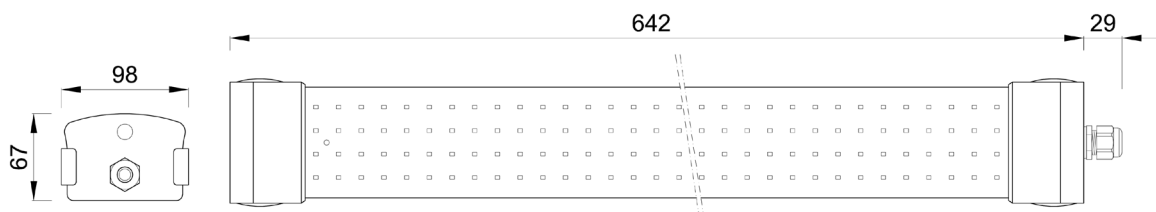
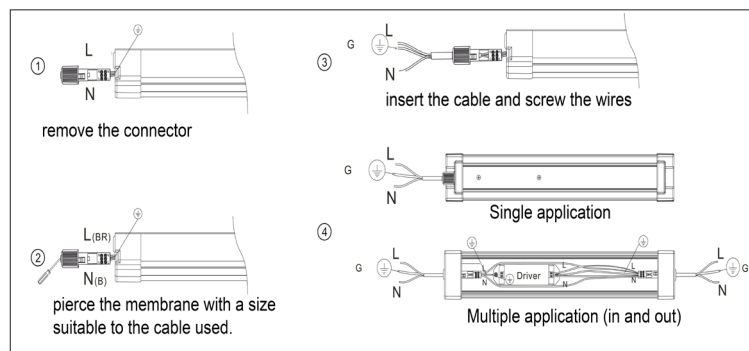
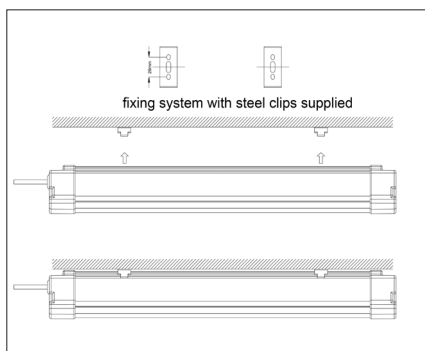

 Photobiological
 Safety Group
 "0"


 120°

ALU-PLUS 0631

ALU-PLUS is a series of waterproof light with integrated LEDs and optics diffuser 120°. Suitable for many applications: home and industrial applications, car parks and underground public areas. The IP66 rating makes it suitable for both indoor and outdoor applications. Extruded aluminum and polycarbonate body with anti-glare diffuser, vandal and flame retardant. Strong structure thanks to the reinforced frame. Stripped diffuser for uniform light distribution. The smooth surface facilitates cleaning process, important for constant light efficiency. Equipped with fast connections system with 2P + T, both for input and output.

Code	Color Temperature	Input Volt	Watt	PFC	lumen output	CRI	LED Chip	Beam Angle	Body	Diffuser	Insulation Class	IP Rate	IK Rate
PSL0631-NW	4000 K	200+240Vac	30W	95	3000 lm	Ra>80	SMD 2835	120°	Aluminium	PC	I	IP66	08



Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
 Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice