



- IP65
- 230Vac
- 3.5W
- Cree LED
- 252 lm (4000K)
248 lm (3000K)
-
-
- Asymmetric
- Cable gland In+Out
- Grey
- Aluminium
- 15°C
+45°C
- 36000 ore (L90B20)

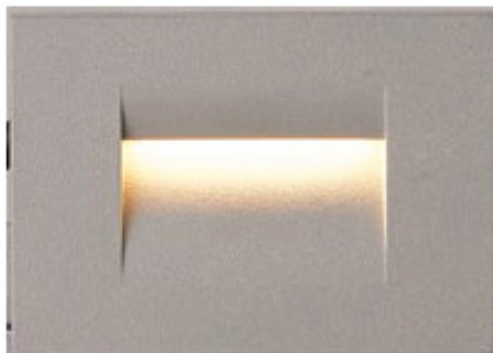

cod. WAL5003-NW
Temp. Col. 4000K
Natural White
cod. WAL5003-WW
Temp. Col. 3000K
Warm White

LED recessed wall lighting, ideal for application in 3-modules (503) standard flush mounting built-in boxes. The asymmetric, anti glare light beam makes it great as marker in outside walkways, gardens, interior corridors and also as a courtesy light in hospital environments and hotels.

Cod.	Col. tempt	Input Volt	Watt	CRI	LED Chip	Beam Angle	Body Material	Front Material	Insulation Class	IP Rate	IK Rate
WAL5003-NW	4000K	230Vac	3.5W	Ra>80	LED	as. 45°	Aluminium	PC	I	65	08
WAL5003-WW	3000K	230Vac	3.5W	Ra>80	LED	as. 45°	Aluminium	PC	I	65	08



WAL5003

