



# Push and Wi-Fi Dimmer

IP20

CE, RoHS





Screws connector

BiancoWhite

PC



**DIMMER**  
cod. LC2501

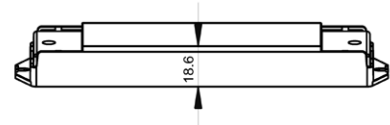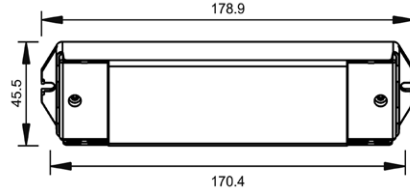

## Receiver Dimmer cod. LC2501

Input: 12Vdc, 24Vdc, 36Vdc  
Output: 12Vdc, 24Vdc, 36Vdc  
I Max Input: **20A**  
I Max Output: 5A x 4 CH (syncro mode)  
Max Carico: 4x60W @ 12V - 4x120W @ 24V  
Ta: -20°C +50°C



## Remote control cod. LC2801

Remote control Dimmer / ON-OFF for 5 zone

Battery: 3Vdc (CR2025 Battery)  
Operation frequency: 434MHZ / 868MHZ  
Ta: -20°C +50°C



## Single Push Button Wi-Fi cod. LC2801K1

Pulsante N.A. senza fili (Wi-Fi)

Battery: 3Vdc (CR2025 Battery)  
Operation frequency: 434MHZ / 868MHZ



Cod. LC2801K1

## Double Push Button Wi-Fi cod. LC2801K2

Doppio Pulsante N.A. senza fili (Wi-Fi)

Battery: 3Vdc (CR2025 Battery)  
Operation frequency: 434MHZ / 868MHZ



Cod. LC2801K2


## Rotor Wi-Fi cod. LC2805R

Dimmer a rotazione. senza fili (Wi-Fi)

Batteria: 3Vdc (CR2025 Battery)  
Operation frequency: 434MHZ / 868MHZ  
Ta: -20°C +50°C



Cod. LC2805R

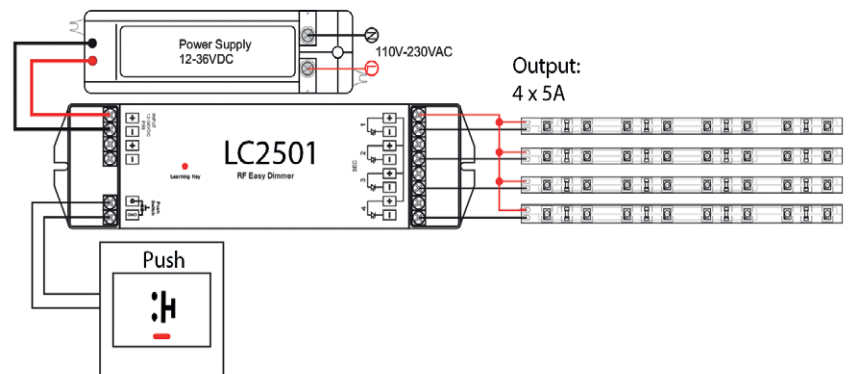

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso  
Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice