


ICE LED PANEL UP&DOWN

30x120



CE, RoHS

- IP41
- 230Vac
- 40W
- SMD LED
- Screws connector
- White frame
- Aluminium / PC
- 25°C
+45°C
- 50000 hr (L80B20)


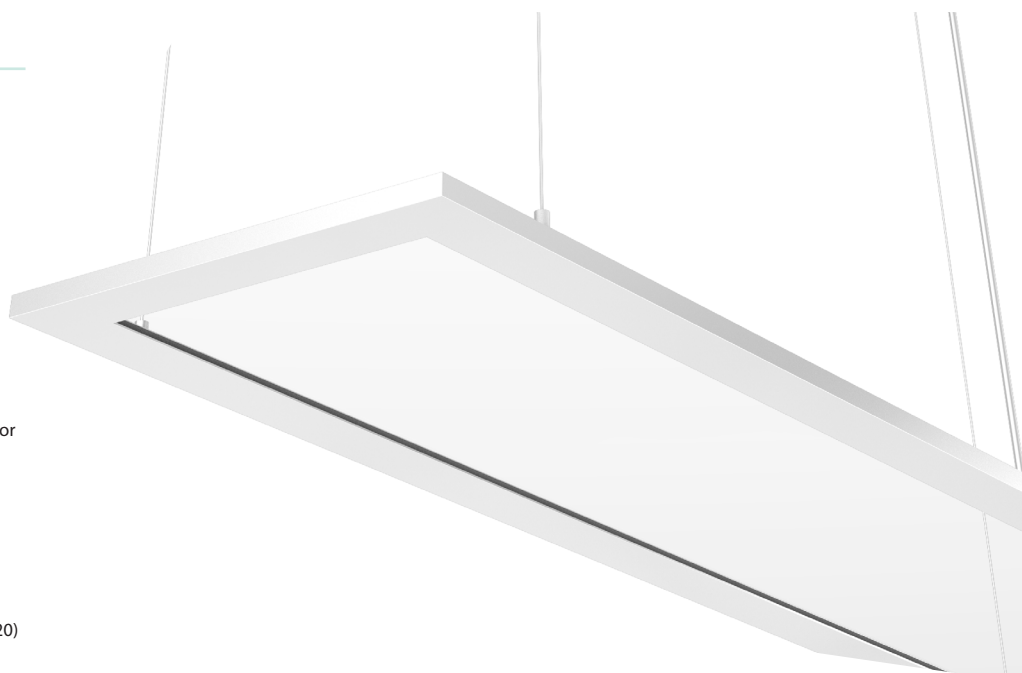


- UGR ≤ 19
- CRI ≥ 80
- LED 140 lm/W
- Dim.
- Photobiological Safety Group GR 0
- Questo dispositivo è munito di lampade a LED integrate
- A++
A+
A } LED
- 120°

ICE PANEL

Ice LED Up & Down is a new dual-emission panel, 55% of the light projected downwards and 45% upwards, this allows good spread throughout the room, creating a comfortable and relaxing atmosphere. Built-in driver, UGR ≤ 19, CRI ≥ 80. Ideal to light up exhibition halls, offices, as well as waiting and meeting rooms. Dimmable version with 0-10V control.

Code	Color temperature	Range Input	Watt	Lumen	CRI	Dimm.	LED Chip	Beam aperture	Material body	Material diffuser	Insulation class	IP Front	IP Rear
IC3012-NW	4000 K	230Vac	40W	4588 lm	Ra ≥80	-	SMD LED	2 x 120°	Aluminium	PC	I	41	41
IC3012-WW	3000 K	230Vac	40W	4535 lm	Ra ≥80	-	SMD LED	2 x 120°	Aluminium	PC	I	41	41
IC3012V-NW	4000 K	230Vac	40W	4588 lm	Ra ≥80	0-10V	SMD LED	2 x 120°	Aluminium	PC	I	41	41
IC3012V-WW	3000 K	230Vac	40W	4535 lm	Ra ≥80	0-10V	SMD LED	2 x 120°	Aluminium	PC	I	41	41

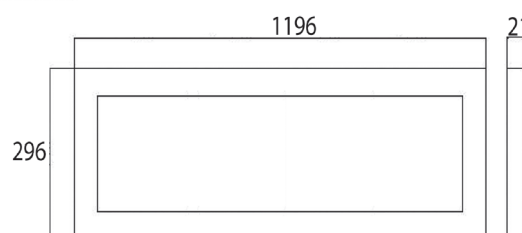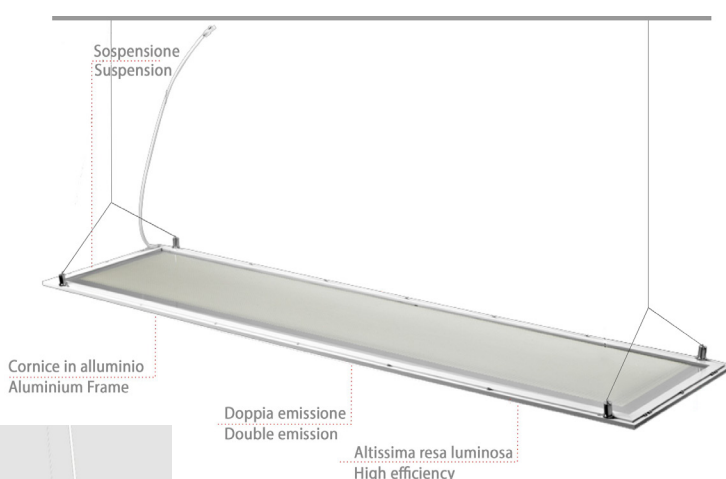

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
 Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice