

LED

BARIO Profile LED

50W



DMX Version:

cod. PRF-0501935D-WW	3000 K
cod. PRF-0501935D-NW	4000 K
cod. PRF-0501935D-W	5700 K

FEATURES:

- 230 V ac 50Hz, 50W
- 50W interchangeable LED Module
- Color temperature 3000 K, 4000 K and 5700 K
- DMX 512 control
- 1 DMX Channel
- Adjustable zoom from 19° to 35°
- Manual zoom
- Linear dimmer 0-100%
- DMX dimmer
- Digital display
- Control connections, Neutrik XLR 5P In&Out
- Power connections, cables
- Heatsink with low noise fan, max 8 dB
- Profile system with 4 steel shutter blades included
- Filter frame included
- Gobo holder optional (AC050)
- Iris diaphragm optional (AC837)
- Aluminium and steel plate body. Scratch resistant black epoxy powder paint
- IP20
- Insulation class I
- Suitable to be fitted on normally inflammable surfaces




Bario 50 DMX LED, is a mini profile zoom spotlight incorporating a 50W LED source, available in 3 different colour temperatures, 3000K, 4000K and 5700K, dimmable by standard DMX signal.

The Bario's excellent optical performance and beam control is the result of Arena Luci's well proven high quality double condenser lens zoom optical system. Suitable for commercial applications, Museums, architectural, theatres and TV studios.

Focus adjustment slide controls for diameter, perfect focus or softness beam outline. Profile system with 4 steel shutter blades included. Optional iris and gobo holder.

Housing in extruded aluminium and steel plate body. Scratch resistant epoxy powder paint.

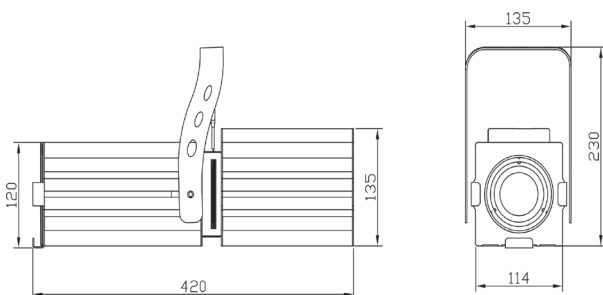

	0	2,5m	5m	7,5m	10m	15m	20m
LUX 19°	3400	850	378	213	95	54	
LUX 35°	2360	590	262	148	66	38	
Ø	1,58m	3,1m	4,73m	6,31m	9,46m	12,61m	
Ø	0,84m	1,67m	2,51m	3,35m	5,02m	6,70m	

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
 Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice